

# **Envisat GDR Quality Assessment Report**

Cycle 018

07-07-2003 11-08-2003

| Prepared by:  | Y. Faugere, CLS  |  |
|---------------|------------------|--|
|               | F. Mertz, CLS    |  |
|               | J. Dorandeu, CLS |  |
| Accepted by:  | J. Dorandeu, CLS |  |
| Approved by : | N. Picot, CNES   |  |







## 1 Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the ocean Envisat mission. The document is associated with data dissemination on a cycle by cycle basis.

The objectives of this document are:

To provide a data quality assessment

To provide users with necessary information for data processing

To report any change likely to impact data quality at any level, from instrument status to software configuration

To present the major useful results for the current cycle

It is divided into the following topics:

General quality assessment and cycle overview CALVAL main results
Cross Calibration with ERS-2

# 2 Cycle overview

#### 2.1 Data and software version

This cycle has been produced with the IPF processing chain V4.54 and the CMA Reference Software V6.1\_01.

The following algorithms have been implemented in this version:

- Neural MWR algorithm
- CLS01.1 Mean Sea Surface
- GOT2000 and FES2002 tide models
- Non parametric Sea State Bias
- DORIS ionospheric correction

#### 2.2 Parameters

The parameters used to compute the sea surface height (SSH) for Envisat are:

- Ku range (ocean retracking)
- POE orbit
- Dual frequency ionospheric correction
- MWR derived wet troposphere correction
- ECMWF dry tropospheric correction
- Non parametric sea state bias
- Inverted barometer correction with time varying pressure
- Total geocentric GOT00 ocean tide height
- Geocentric pole tide height
- Solid earth tide height

## 2.3 Warnings and recommendations

25 passes are missing due to level B data unavailability (see section 3.1).

34 passes have no radiometer correction (see section 3.2).

As mentionned by J. Benveniste (internet communication, 9 nov 2002) an anomaly occasionally occurs on the S-Band. Consequently the Dual Frequency ionosphere correction is not available during these periods. 61 passes are impacted by the S-Band anomaly (see section 3.2).

#### 2.4 Platform and instrument events

RA2 unavailability (RA-2 in STBY/REF due to MCMD timeout) from 26 Jul 2003 15:28:11 to 26 Jul 2003 17:25:35

RA2 unavailability (RA-2 picked up Mission Planning schedule) from 31 Jul 2003 16:11:02 to 31 Jul 2003 18:06:30

Orbit Maintenance Maneuver (from 2003/07/11 0:58:45 to 2003/07/11 03:49:08 TAI)

## 2.5 Cycle quality and performances

Good general results are obtained for this cycle of data.

The crossover standard deviation is 7.71 cm rms when using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (>|50| deg). The standard deviation of Sea Level Anomalies (SLA) relative to the CLS01V1 Mean Sea Surface is 10.4 cm. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (>|50| deg) it lowers to 8.9.


Detailed CALVAL results are presented in **section 3**.

# 3 CALVAL main results

This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

## 3.1 Missing measurements

2600050 are present, and 114837 (4.2%) are missing. The maps below illustrate missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.

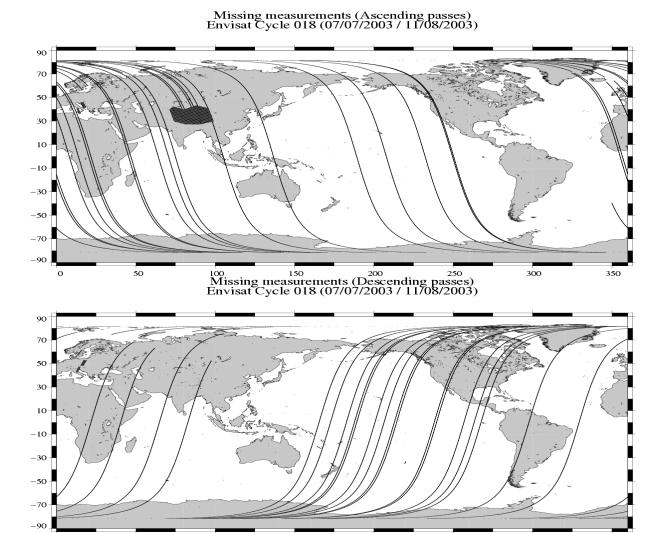

 $25~{\rm passes}$  are missing all due to level 1 B data unavailability.

100

- Passes 538 are missing due to RA-2 unavailability (RA-2 in STBY/REF due to MCMD time-out)

250

150

- Passes 682 are missing due to RA-2 unavailability (RA-2 picked up Mission Planning schedule)

#### 3.2 Edited measurements

#### 3.2.1 Statistics

Data editing is necessary to remove altimeter measurements having lower accuracy.

First, there is an editing using flags. Compared to the GDR product, two additional flags are computed:

An ice flag to detect sea ice measurements. A measurement is set to ice if, at high latitudes (> |50| deg), one of the following criteria is valid:

- Number of 20Hz measurement < 17
- |MWR ECMWF| wet tropospheric correction > 10cm
- Peakiness > 2

A S-band anomaly flag: this flag is set if |Sigma0(Ku)-Sigma0(S)| > 5dB

Notice that this flag is set over land and ice, even when no S-band anomaly occurs.

| Parameter            | Nb rejected | % rejected |
|----------------------|-------------|------------|
| Radiometer land flag | 959057      | 43.59      |
| Ice flag             | 763185      | 34.69      |
| S-Band anomaly flag  | 506996      | 23.04      |

Then, measurements are edited using thresholds on several parameters. These thresholds are expected to remain constant throughout the Envisat mission, so that monitoring the number of edited measurements allows a survey of data quality.


The next table gives for each tested parameter, minimum and maximum thresholds, the number and the percentage of points removed.

| Parameters                           | Min<br>Thres. | Max<br>Thres. | Nb rejected | % rejected |
|--------------------------------------|---------------|---------------|-------------|------------|
| Sea surface height (m)               | -130.000      | 100.000       | 934         | 0.08       |
| Variability relative to MSS (m)      | -2.000        | 2.000         | 4504        | 0.37       |
| Number of 18Hz valid points          | 10.000        | -             | 76          | 0.01       |
| Std. deviation of 18Hz range (m)     | 0.000         | 0.250         | 14706       | 1.21       |
| Off nadir angle from waveform (deg2) | -0.200        | 0.160         | 9519        | 0.78       |
| Dry tropospheric correction (m)      | -2.500        | -1.900        | 0           | 0.00       |
| Invert barometer correction (m)      | -2.000        | 2.000         | 0           | 0.00       |
| MWR wet tropospheric correction (m)  | -0.500        | -0.001        | 1492        | 0.12       |
| Dual Ionospheric correction (m)      | -0.400        | 0.040         | 1540        | 0.13       |
| Significant wave height (m)          | 0.000         | 11.000        | 1096        | 0.09       |
| Sea state Bias (m)                   | -0.500        | 0.000         | 2303        | 0.19       |
| Backscatter coefficient (dB)         | 7.000         | 30.000        | 1613        | 0.13       |
| GOT00 ocean tide height (m)          | -5.000        | 5.000         | 1220        | 0.10       |
| Long period tide height (m)          | -0.500        | 0.500         | 0           | 0.00       |
| Earth tide (m)                       | -1.000        | 1.000         | 0           | 0.00       |
| Pole tide (m)                        | -5.000        | 5.000         | 0           | 0.00       |
| RA2 wind speed (m/s)                 | 0.000         | 30.000        | 0           | 0.00       |

A final editing is then performed on corrected sea surface height, using a spline fitting procedure, leading to remove 527 ( 0.04 %) measurements.

## 3.2.2 Figures

The following maps are complementary: they show respectively the removed and selected measurements in the editing procedure.

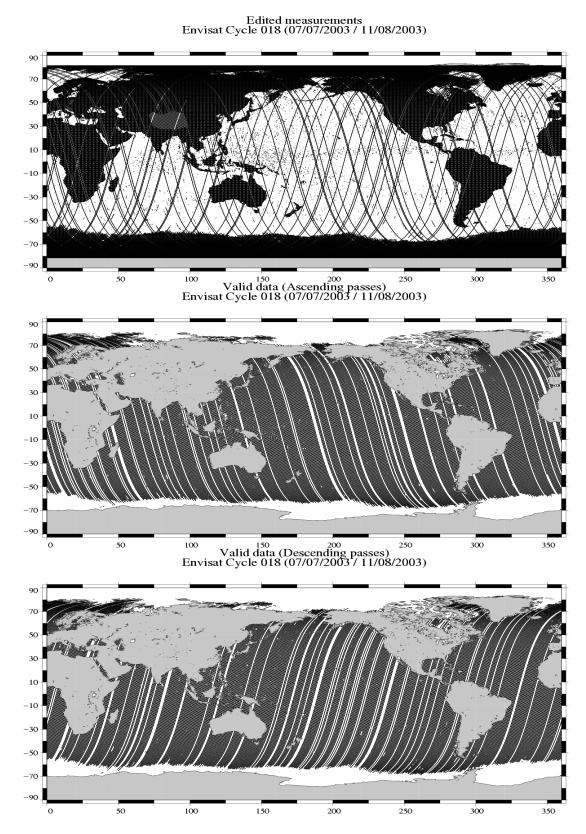

ENVISAT GDR Quality Assessment Report Cycle 018 07-07-2003 11-08-2003 SALP-RP-P2-EX-21072-CLS018 Page 6

#### 3.2.3 Comments


977 passes have been delivered. Among these passes:

- 34 passes are entirely edited on the radiometer land flag (no MWR correction)
- 61 passes (151 to 165, 290 to 309, 627 to 629, 738 to 760) are edited because of S-Band anomalies. Users are advised not to use the S-Band parameters and the dual ionospheric correction on these passes.

Wet areas appear in the plot of removed data. Similar features are observed with other altimeters (T/P, Jason) mainly due to rain comtamination.


## 3.3 Altimeter parameters

In order to assess and to monitor altimeter parameter measurements, histograms of Envisat Kuband Significant Wave Height (SWH), Backscatter coefficient (Sigma0) and RMS of altimeter range are computed.

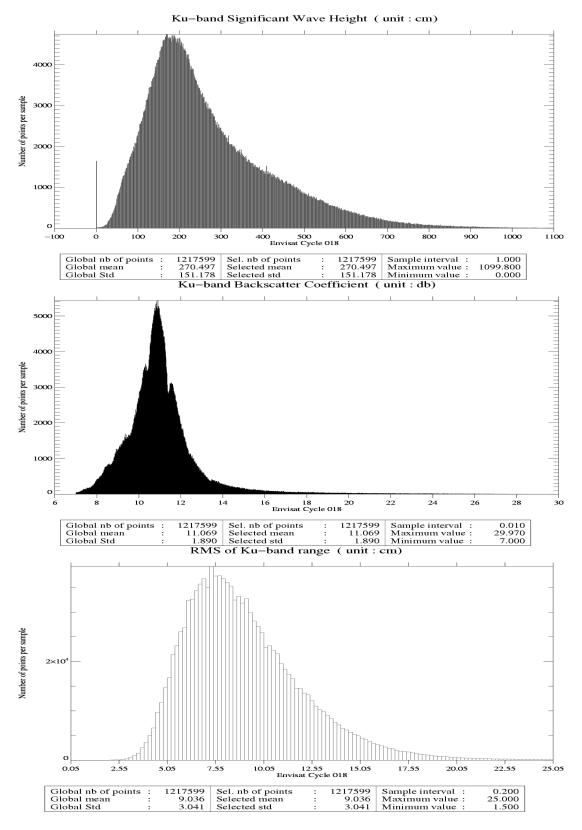

### 3.4 Radiometer


In order to assess and to monitor radiometer measurements, a scatter plot between the radiometer wet troposphere correction and the ECMWF model is computed for the valid data set previously defined.

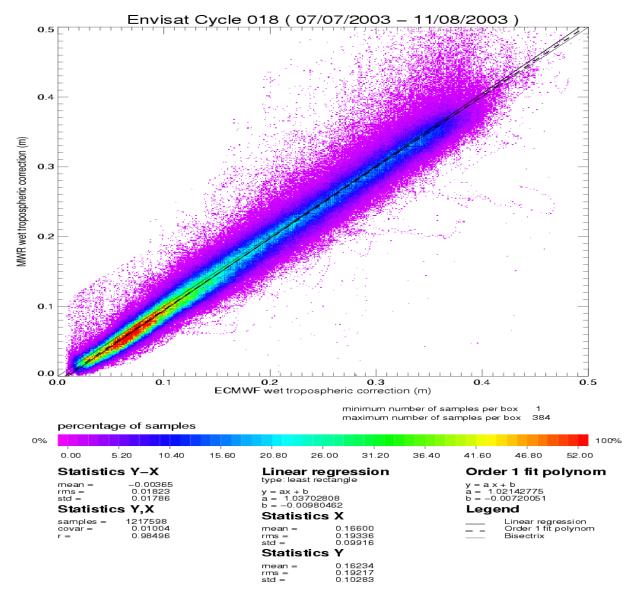

The radiometer-model mean difference is 0.4 cm. A drift on the Envisat 23.8GHz brightness temperature has been detected and has to be monitored on the long term. Note that the neural algorithm is now implemented on Envisat.

## 3.5 Wind and wave maps

These two figures show wind and wave estimations derived from 35 days of altimeter measurements.

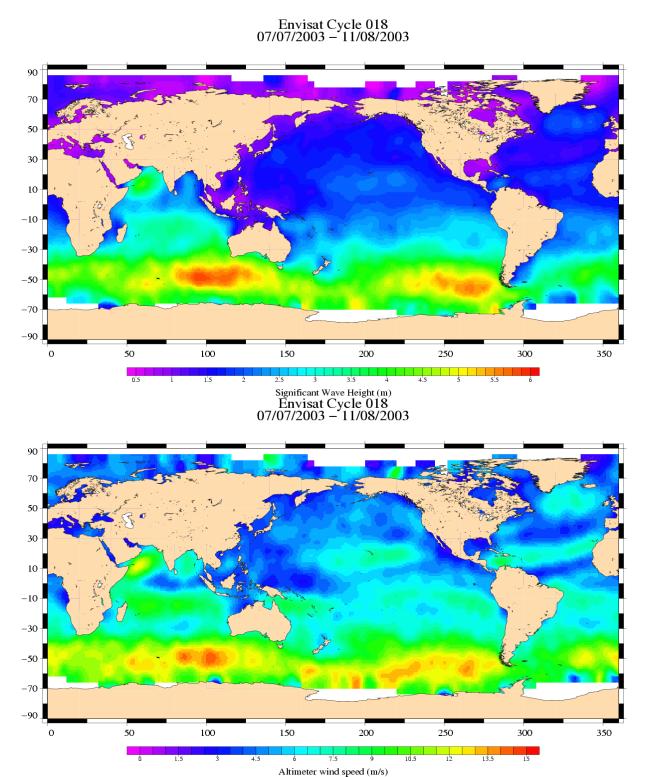

#### 3.6 Crossover statistics

#### 3.6.1 General comment


SSH crossover statistics are computed from the valid data set. They are used to estimate the data quality and to monitor the system performances. After data editing and using the standard Envisat algorithms, the crossover standard deviation is about 9.04 cm rms, when using a selection to remove shallow waters (1000 m). When using an additional selection to remove areas of high ocean variability and high latitudes (> |50| deg) it lowers to 7.71 cm rms. This statistic is a stable estimation of the system performance as it is not influenced by sea ice coverage.

## 3.6.2 Impact of geophysical corrections

This figure shows the impact of geophysical corrections on crossover mean and rms. A selection is used to remove shallow waters (1000 m).

For this analysis two corrections have been computed: an orbit error and a model ionospheric correction. The orbit error estimation is performed by a global minimization of crossover differences using a (1 and 2 cycles/revolution) sinusoidal model. The model ionospheric correction is computed using the JPL's version of the GPS Ionosphere Maps (JPL GIM) thanks to the procedures provided by Remko Scharro (internet communication to the CCVT community, December 12, 2002).


## **ENEN - CROSSOVER STATISTICS**

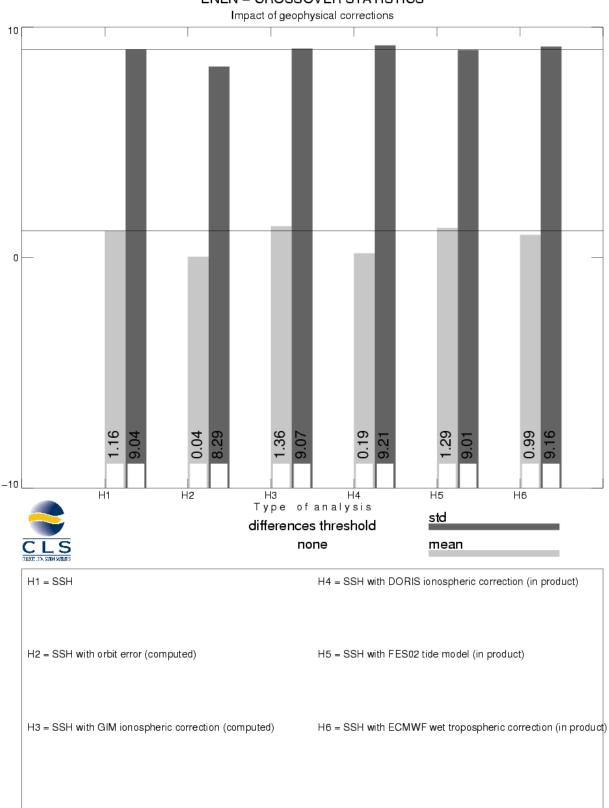


## 3.7 SSH variability


# 3.7.1 Sea Level Anomaly

Repeat-track analysis is routinely used to compute Sea Level Anomalies (SLA) relative to the previous cycle and relative to a mean profile. The mean profile has been computed using ERS-1 and ERS-2 data and has been ajusted on the 7 year TP mean profile. In order to see fine features SLA are centered about the mean value.



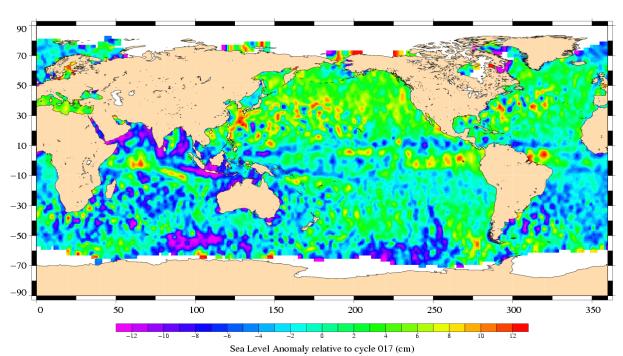

## Envisat Cycle 018 07/07/2003 – 11/08/2003

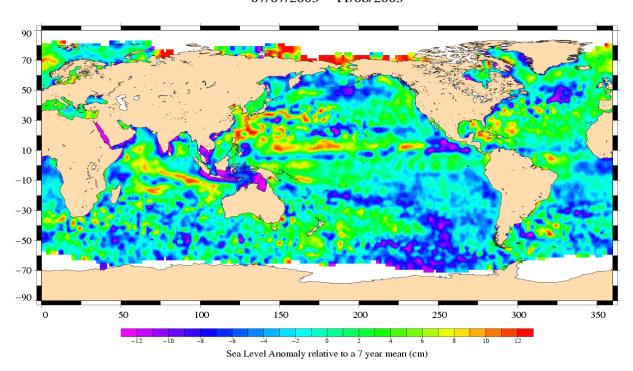

## 3.7.2 Comparison to a precise Mean Sea Surface


The MSS from the product is used as a reference to compute SLA. Global statistics of Envisat SSH-MSS are (cm):


| Number  | Mean  | Std. dev. |
|---------|-------|-----------|
| 1359120 | 43.69 | 10.37     |

When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (> |50| deg) statistics are:


| Number | Mean  | Std. dev. |
|--------|-------|-----------|
| 852092 | 43.94 | 8.90      |

The two following maps respectively show the map of Envisat SLA relative to the MSS and differences higher than a 30 cm threshold. In order to see fine features SLA are centered about the mean value. The latter figure shows that apart from isolated measurements, higher differences are located in high ocean variability areas, as expected.



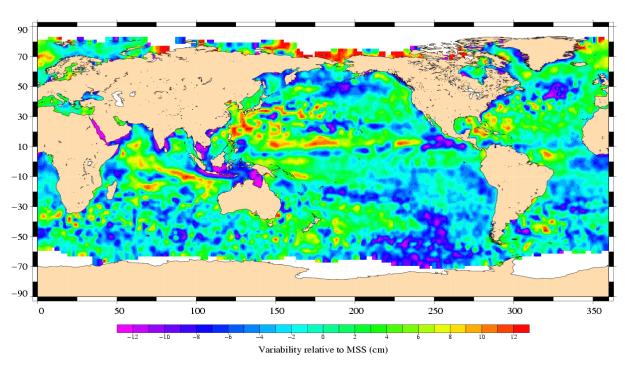

# (SSH – MSS) centered, differences greater than 30 cm Envisat / Cycle 018

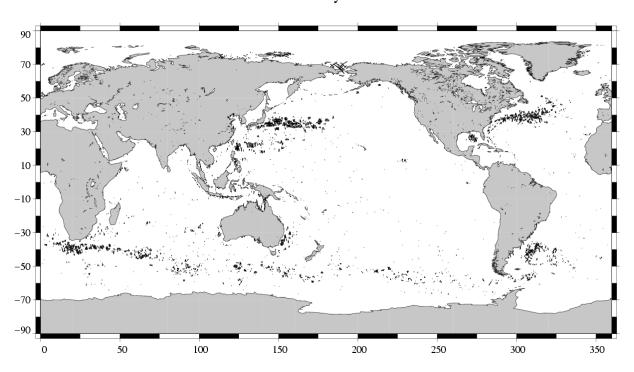

## 4 Cross Calibration with ERS-2

Envisat flies on the same ground track as ERS-2, 30 minutes ahead. This section presents results that illustrate the difference with ERS-2.


A failure of the ERS-2 tape recorder occured on 22 June 2003. Since then, the ERS-2 Low Rate mission has gone on within the visibility of ESA ground stations over Europe, North Atlantic, the Arctic and western North America. Nevertheless, cross calibration with ERS-2 can be performed on this zone. Envisat cycle 018 data are collocated to data from ERS-2 GDR cycle 085 in order to compare the main parameters from repeat-track analysis.

# 4.1 [ERS-2 - Envisat] Ku SWH differences


Global statistics of [ERS-2 - Envisat] Ku SWH differences are (cm):


| Number | Mean   | Std. dev. |
|--------|--------|-----------|
| 70230  | -21.38 | 24.94     |

The scatter plot between Envisat and ERS-2 Ku SWH measurements is given on the following figure:

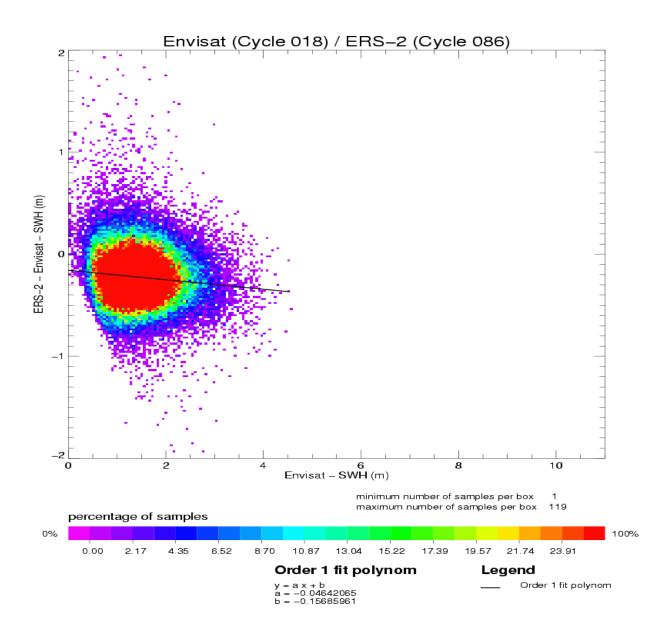

These differences are plotted on the following figure (data are centered about the mean value).



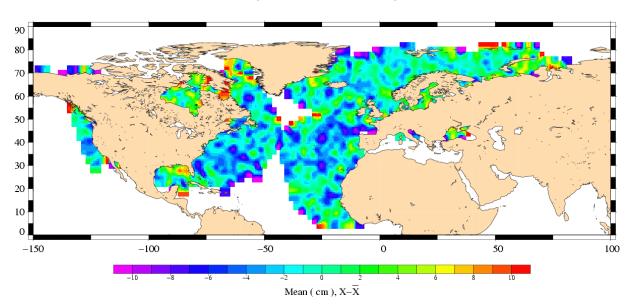


# 4.2 [ERS-2 - Envisat] Ku Sigma0 differences


Global statistics of [ERS-2 - Envisat] Ku Sigma0 differences are (dB):


| Number | Mean | Std. dev. |
|--------|------|-----------|
| 70230  | 0.06 | 0.34      |

The scatter plot between Envisat and ERS-2 Ku Sigma0 measurements is given on the following figure:

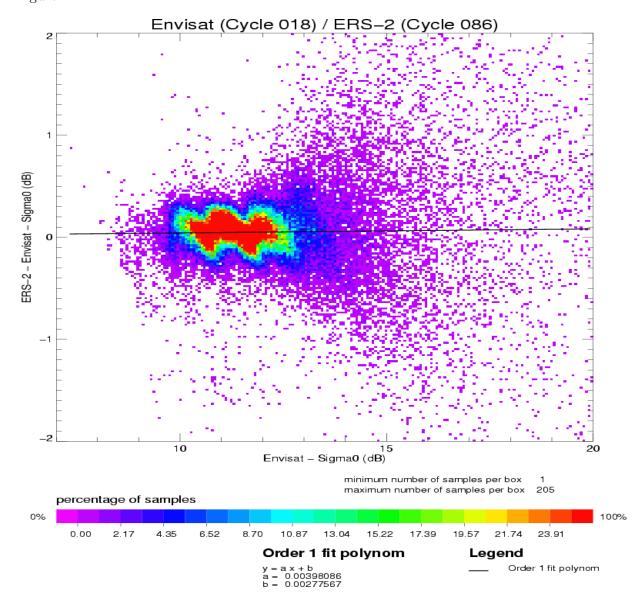

Particular features on the scatter plot mainly come from the shape of ERS-2 histogram.



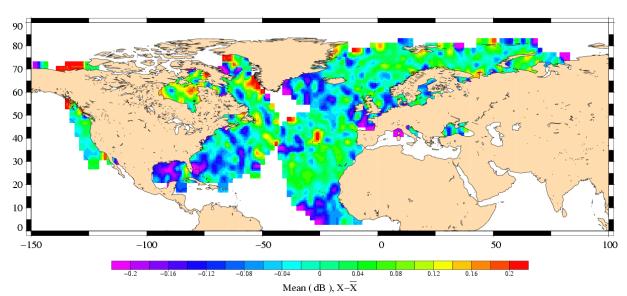


## 4.3 [ERS-2 - Envisat] radiometer wet troposphere correction differences

The ERS-2 radiometer correction is recomputed to correct the gain drop and the drift of the 24 GHz brightness temperature (Obligis et al., 2003).

Global statistics of [ERS-2 - Envisat] radiometer wet troposphere correction differences are (cm):


| Number | Mean | Std. dev. |
|--------|------|-----------|
| 70230  | 0.40 | 0.73      |

The scatter plot between Envisat and ERS-2 radiometer wet troposphere corrections is given on the following figure:

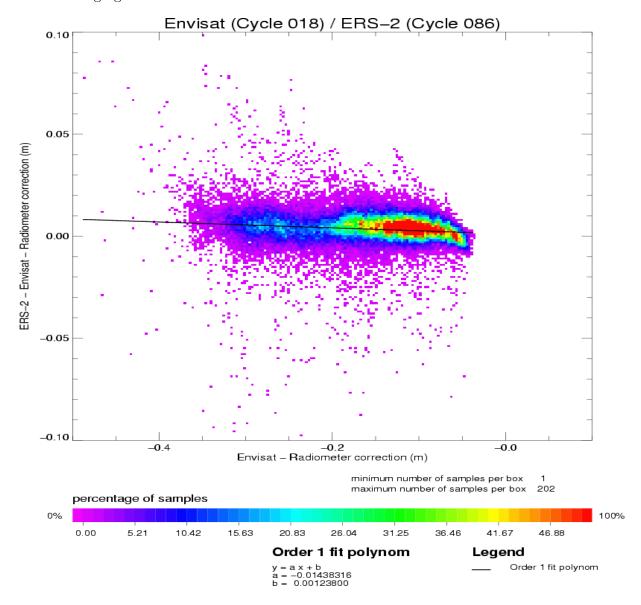

The differences between Envisat and ERS-2 radiometer corrections are plotted on the following figure (data are centered about the mean value).

## Radiometer correction differences ERS-2 (Cycle 086) – Envisat (Cycle 018)

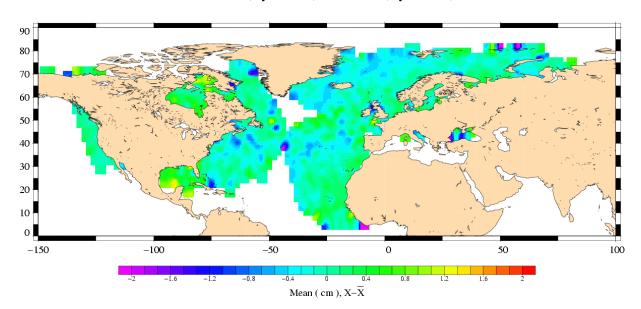

# 4.4 [ERS-2 - Envisat] SSH differences

In order to compare the ERS-2 SSH with the Envisat SSH, ERS-2 GDRs have been updated with algorithms and corrections similar to Envisat:

- Range corrected from SPTR, USO, time tag bias
- ECMWF wet tropospheric correction
- Model dry tropospheric correction
- 3-parameters sea state bias
- Inverted barometer correction with time varying pressure
- Total geocentric GOT00 ocean tide height
- Geocentric pole tide height
- Solid earth tide height
- GIM ionospheric correction
- DPAF orbit (No DGME-04 orbit files are available for cycle 085, the initial orbit was then used.


The correction used for Envisat are those described in **section 2.2** except for:


- Total geocentric GOT00 ocean tide height
- GIM ionospheric correction
- ECMWF wet tropospheric correction

Global statistics of [ERS-2 - Envisat] SLA differences (cm):

| Number | Mean   | Std. dev. |
|--------|--------|-----------|
| 70115  | -33.97 | 7.52      |

These SSH differences are plotted on the following figure.



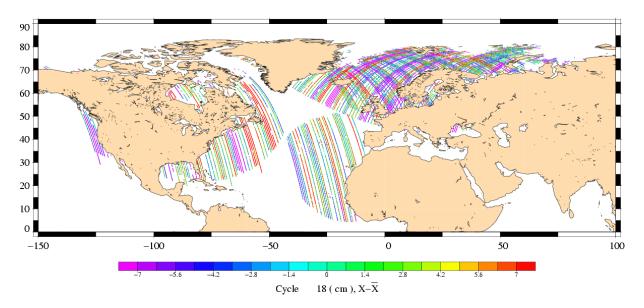

The main source of differences is the ERS-2 orbit errors.